

© copyright SHUNT ITALY ALL RIGHTS RESERVED

SHUNT ITALY  
 www.shuntitaly.it  
 info@shuntitaly.it




<b>English</b>	Dimensions according to DIN 43703 standard Electrical performance on CEI 13-6, IEC51, EN0051 Accuracy class: 0,25, 0.5, 1 and 2 (calibrated at 20 °C) Operating temperature: from -20 to 60 °C
<b>Italiano</b>	Dimensioni in accordo allo standard DIN 43703 Performance elettriche secondo CEI 13-6, IEC51, EN0051 Classi: 0.25, 0.5, 1 e 2 (taratura a 20 °C) Temperatura di operazione: -20 a 60 °C
<b>Español</b>	Dimensiones según estándar DIN 43703 Performance de acuerdo a CEI 13-6, IEC51, EN0051 Clase de precisión: 0.25, 0.5, 1, 2 (20 °C) Temperatura de operación: desde -20 a 60 °C

***Voltalge drop / Caduta di tensione/ Caída de tensión:***  
***60 mV***

Model	Current [A]	Dimensions [mm]										Num. of terminals	Bolt size	Weight [kg]
		A	B	C	D	E	F	G	H	I				
	3000 - 4000	165	65	120	30	60	15	10	115	60	4	M20x60		
	5000 - 6000	175	70	154	25	52	25	15	125	130	6	M20x75		
	8000 - 10000	185	75	206	25	52	30	20	135	170	8	M20x75		
	15000 - 20000	185	75	310	25	52	30	20	135	170	12	M20x75		

***100mV***

	3000 - 4000	198	70	154	25	52	25	15	148	130	6	M20x60	
	5000 - 6000	175	70	154	25	52	25	15	125	130	6	M20x75	
	8000 - 10000	208	75	206	25	52	30	20	158	170	8	M20x75	
	15000 - 20000	208	75	310	25	52	30	20	158	170	12	M20x75	

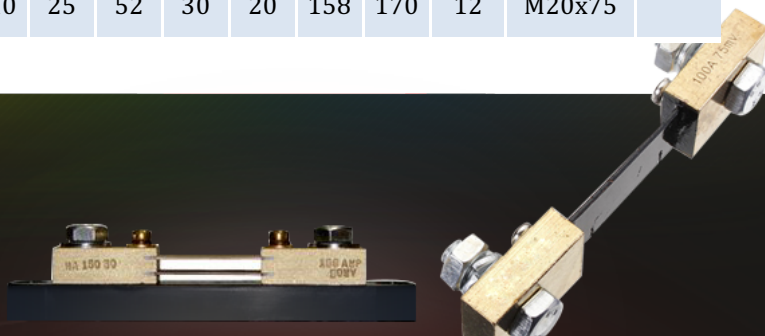

**150mV**

3000 - 4000	165	65	120	30	60	10	115	120	60	6	M20x60
5000 - 6000	175	70	154	25	52	25	15	125	130	6	M20x75
8000 - 10000	310	75	206	25	52	30	20	260	170	8	M20x75
15000 - 20000	310	75	310	25	52	30	20	260	170	12	M20x75

